
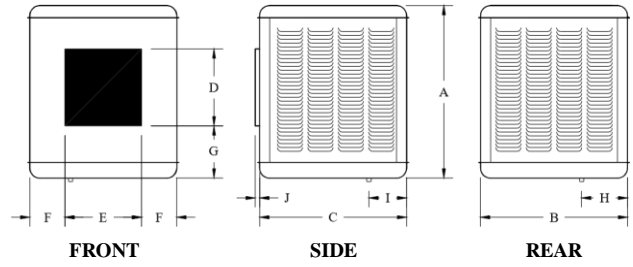


DOWN DISCHARGE UNITS

SIDE UNITS

DISCHARGE

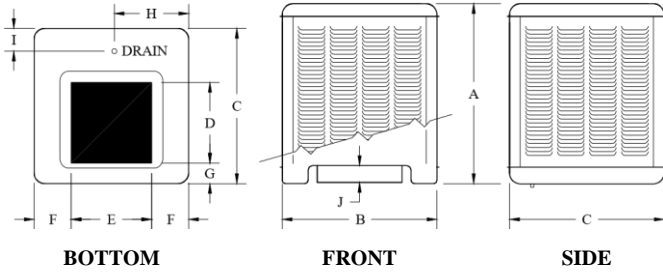

GENERAL SPECIFICATIONS*

MODEL NO.	WEIGHT LBS.		CABINET DIMENSIONS			DUCT OPENING		DUCT LOCATION		DRAIN		DUCT EXT. J	FILTER PAD DIMENSIONS*			MOTOR PULLEY PART NO.	DRIVE BELT
	†SHIP.	††OPER.	A	B	C	D	E	F	G	H	I		NO. REQ'D	HEIGHT	WIDTH		
DOWN DISCHARGE																	
3000DD	118	175	33 7/16	28 1/8	28 1/8	13 5/8	13 5/8	7 1/4	4 5/8	17 11/16	5 3/16	3 3/4	4	27	22	110277	4L-450
4001DD	161	233	34 1/2	34 1/8	34 1/8	17 3/4	17 3/4	8 3/16	4 1/4	16 13/32	5	3 23/32	4	28	27	110278	4L-560
5000DD	220	309	42 7/16	39	39	19 3/4	19 3/4	9 5/8	4 1/4	25 13/32	5 1/2	4	4	36	33	110278	4L-690
SIDE DISCHARGE																	
3000SD	109	193	33 7/16	28 1/8	28 1/8	13 5/8	13 5/8	7 1/4	12 3/32	12 25/32	8 3/4	1	3	27	22	110277	4L-450
4001SD	150	269	34 1/2	34 1/8	34 1/8	17 3/4	17 3/4	8 3/16	12 1/16	10 21/32	8 3/4	1	3	28	27	110278	4L-560
5000SD	202	357	42 7/16	39	39	19 3/4	19 3/4	9 5/8	16 21/32	15 21/32	8 3/4	1	3	36	33	110278	4L-670

* All Dimensions in inches.
 † Shipping weight is without motor.
 †† Operating weight shown is total weight of unit, motor and water.

MOTOR SPECIFICATIONS						CFM** INCHES STATIC PRESSURE										PUMP SPECIFICATIONS				
MODEL NO.	H.P.	MOTOR PART NO.	SPEED	VOLTS	AMPS*	.1		.2		.3		.4		.5		PUMP PART NO.	VOLTS	AMPS		
						RPM	CFM	RPM	CFM	RPM	CFM	RPM	CFM	RPM	CFM					
DOWN DISCHARGE																				
3000DD	1/3	110444	1	115	7.2	2175	562	2060	580	1970	603	1810	630	1650	660	1520	690	110436	120	0.7
		110445	2			2777	376	2880	400	2565	420	2240	440	NR	-	NR	-			
4001DD	1/3	110444	1	115	7.2	3077	376	2880	400	2565	420	2240	440	NR	-	NR	-	110436	120	0.7
		110445	2			3654	443	3430	460	3230	475	3064	494	2498	514	2010	539			
5000DD	1/2	110446	1	115	9.8	4334	318	4000	330	3620	343	3300	363	2610	375	2170	405	110436	120	0.7
		110447	2			4983	370	4780	382	4530	396	4280	411	4020	427	3780	446			
5000DD	3/4	110448	1	115	13.8	4983	370	4780	382	4530	396	4280	411	4020	427	3780	446	110436	120	0.7
		110449	2																	
SIDE DISCHARGE																				
3000SD	1/3	110444	1	115	7.2	2077	574	1950	595	1760	615	1700	645	1550	665	NR	-	110436	120	0.7
4001SD	1/3	110444	1	115	7.2	2973	402	2726	420	2550	435	2230	461	NR	-	NR	-	110436	120	0.7
4001SD	1/3	110445	2	115	7.2													110436	120	0.7